


POWER CONTROL UNIT



FLEXIBLE DESIGN • SCALABLE • RELIABLE

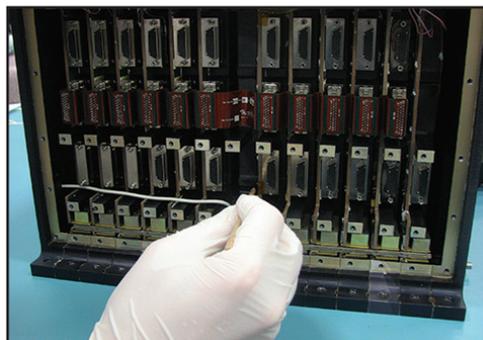

OVERVIEW

Developed for the RADARSAT Constellation Mission (RCM), Magellan's power control unit (PCU) serves as the interface between the spacecraft solar array, battery and power bus. The PCU manages power transfers from the solar arrays to the batteries and provides fault-protected switches between the batteries and other spacecraft subsystems and payloads. It also provides extensive telemetry for determining the health of the power bus, including battery A-hr integrators, as well as solar array and individual switch current monitors. Magellan's PCU is designed to be scalable, capable of meeting power needs from 100 W to 3 kW, and can be configured to be either single or dual string.

EXAMPLES OF REPRESENTATIVE PCU CONFIGURATIONS

	RADARSAT Constellation Mission	Generic SmallSat Mission
Card Complement:	<ul style="list-style-type: none">• 2 controller cards (dual string)• 5 switch cards with 24 switches each• 3 propulsion/pyrotechnics cards• 1 solar array card• 1 battery card	<ul style="list-style-type: none">• 1 controller card (single string)• 1 switch card with 24 switches• 1 solar array card• 1 battery card
Power:	<ul style="list-style-type: none">• Peak dissipation under peak load: <60 W<ul style="list-style-type: none">- Assuming 2000 W peak spacecraft power, with 1000 W from solar array and 1000 W from battery• Dissipation under orbit-average load: <50W<ul style="list-style-type: none">- Assuming orbit-average spacecraft power demand of 550 W	<ul style="list-style-type: none">• Peak dissipation under peak load: <35 W<ul style="list-style-type: none">- Assuming 500 W peak spacecraft power, with 250 W from solar array and 250 W from battery• Dissipation under orbit-average load: <30 W<ul style="list-style-type: none">- Assuming orbit-average spacecraft power demand of 150 W
Input Voltage:	<ul style="list-style-type: none">• 28±6 V_{DC} unregulated	<ul style="list-style-type: none">• 28±6 V_{DC} unregulated
Mass:	<ul style="list-style-type: none">• 27 kg	<ul style="list-style-type: none">• 12 kg
Dimensions (LxWxH):	<ul style="list-style-type: none">• 36×37×23 cm	<ul style="list-style-type: none">• 18×37×23 cm
Quiescent Power:	<ul style="list-style-type: none">• 20 W	<ul style="list-style-type: none">• 20 W

SCALABLE HARDWARE CONFIGURATION

The innovative “by the slice” modular design of the Magellan PCU allows customers to choose only the mission-specific functionality and level of redundancy required, thereby optimizing mass, power and volume. For example, a generic smallsat mission requiring less than 750 W could be supported with four cards (controller, solar array, battery, switch).

- Controller card
- Solar array card
- Battery card
- Switch card(s)
- Propulsion/pyrotechnics card

Enhanced functionality for more complex missions would require the inclusion of additional cards.

RADIATION TOLERANCE

Total Ionizing Dose: >50 krad (Si)
Single Event Latchup Threshold: 59 MeV·cm²/mg

FLIGHT HERITAGE

RADARSAT Constellation Mission (launch in 2018)

ABOUT MAGELLAN AEROSPACE

Magellan Aerospace (TSX: MAL) is a global company that provides products and solutions to the aviation, defense and space markets, with facilities in Canada, the United States, Europe and India. The company's Space and Rocket business has over fifty years of flight heritage on NASA and CSA missions including Black Brant sounding rockets, sub-orbital payloads, Shuttle and ISS experiments, and satellite missions. Magellan's space solutions include the microsatellite-class MAC-100 bus and the smallsat-class MAC-200 bus, as well as command and data handling (C&DH) and power control unit (PCU) subsystems.

For more information contact:

Eric Choi
Senior Business Development Manager
Phone: +1 613 820 1287 x211
Email: eric.choi@magellan.aero

Printed in Canada

Magellan Aerospace
3160 Derry Road East
Mississauga, ON Canada L4T 1A9

905 677 1889
www.magellan.aero